


# 101P

# GLEASON PowerTrak<sup>®</sup> GRP

- COMPACT DESIGN
- NON-CONDUCTIVE, RESISTS CORROSION
- RADII AVAILABLE = 1.43" & 1.91"

- TOTAL TRAVEL SELF-SUPPORTED NO SAG = 4.0 FT<sup>①</sup>
- TOTAL TRAVEL SELF-SUPPORTED W/SAG = 5.5 FT<sup>①</sup>
- MAX. CABLE/HOSE O.D. = 0.62"

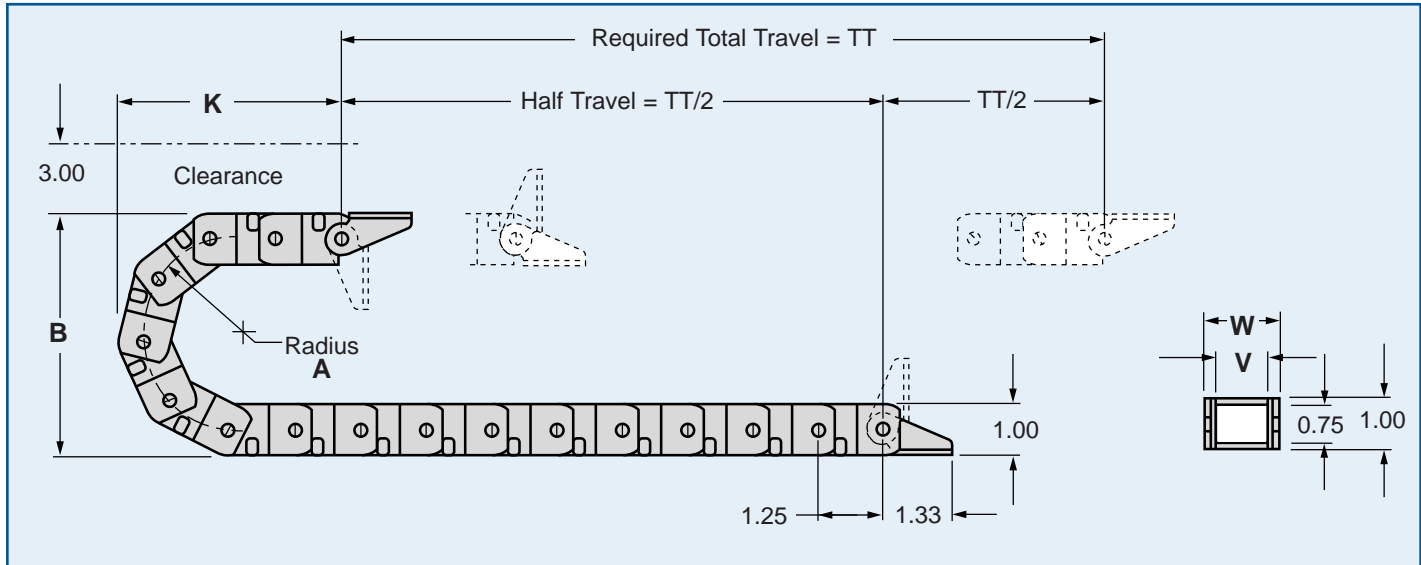

## 101P Dimensions IN INCHES UNLESS OTHERWISE INDICATED

Model Number	RADIUS A	HEIGHT B	MIN. K	CURVE L <sup>④</sup>	WINDOW V	CABLE MAX. O.D.	WIDTH W	WEIGHT (lbs/ft) <sup>⑤</sup>
101P-I-1.4	1.43	3.86	5.68	1.0 ft.	0.59	0.34 in.	1.03	0.20
101P-II-1.4	1.43	3.86	5.68	1.0 ft.	1.00	0.62 in.	1.44	0.25
101P-II-1.9	1.91	4.82	5.41	1.0 ft.	1.00	0.62 in.	1.44	0.25

Length to order<sup>③</sup> =

$$\frac{TT}{2} + L$$

### NOTES:

- ① Total Travel is nominal, based on standard travel with cable/hose pkg weight of 0.5 lbs/ft., and may vary with environment.
- ② For standard travel, i.e. two-way payout as pictured above.
- ③ L = Minimum length in FEET to form PowerTrak GRP curve.
- ④ Weight per foot UNLOADED.

## Mounting Bracket Kits

DIMENSIONS IN INCHES

- Each bracket kit contains one MALE bracket, typically installed on the fixed end and one FEMALE bracket, typically installed on the moving end.

