

INDUSTRIAL DUTY CORD REELS

Open Spool Cord reels with fluorescent or incandescent lamp, single or dual outlet. Also available with bare cord end. All reels include automatic spring rewind, a multi-position four roller cord guide & a 48" pigtail with three prong plug. Ideal for a wide variety of industrial applications mounted from wall, ceiling or under work bench. These reels are available with your choice of single or dual outlet, incandescent hand lamp, fluorescent hand lamp or with bare cord. Cord lengths from 25' to 70'. All reels include adjustable cord stop, spring rewind and ratchet lock. Operator simply pulls cord off spool. Ratchet lock maintains desired cable length and, when task is completed, a slight pull releases the ratchet allowing the spring motor to rewind the cord. Reels feature heavy steel frame with baked-on polyester finish. Fully gasketed steel Slip-ring housing. Both hand lamps include on-off switch. Fluorescent lamp features directed light, polycarbonate outer tube and integral ballast. Twenty amp duplex box includes ground fault circuit interrupter (GFCI). **Consult factory if installation height is greater than 16'.**



Reel with
FLUORESCENT LAMP



Reel with
SINGLE OUTLET



Reel with
DUPLEX OUTLET BOX




Reel with
INCANDESCENT LAMP

MODEL LIST—CORD REELS

Incl. Cord	Accessory	Amps	CORD DATA				Weight lbs. (kg)	Model
			AWG	Cond	Length ft (m)	Type		
Yes	Incandescent	10	16	3	25 (8)	SJOW-A/SJO	23.3 (10.6)	GCA16325-HL
Yes	Incandescent	10	16	3	35 (11)	SJOW-A/SJO	24.2 (11.0)	GCA16335-HL
Yes	Incandescent	10	16	3	50 (15)	SJOW-A/SJO	25.6 (11.6)	GCA16350-HL
Yes	Incandescent	10	16	3	70 (21)	SJOW-A/SJO	40.0 (18.2)	GCC16370-HL
Yes	Fluorescent	0.3	16	3	25 (8)	SJOW-A/SJO	23.8 (10.8)	GCA16325-FL
Yes	Fluorescent	0.3	16	3	35 (11)	SJOW-A/SJO	24.7 (11.2)	GCA16335-FL
Yes	Fluorescent	0.3	16	3	50 (15)	SJOW-A/SJO	26.0 (11.8)	GCA16350-FL
Yes	Fluorescent	0.3	16	3	70 (21)	SJOW-A/SJO	40.5 (18.4)	GCC16370-FL
Yes	Single Recept	10	16	3	25 (8)	SJOW-A/SJO	22.8 (10.4)	GCA16325-SR
Yes	Single Recept	10	16	3	35 (11)	SJOW-A/SJO	23.7 (10.8)	GCA16335-SR
Yes	Single Recept	10	16	3	50 (15)	SJOW-A/SJO	25.0 (11.4)	GCA16350-SR
Yes	Single Recept	10	16	3	70 (21)	SJOW-A/SJO	35.3 (16.1)	GCC16370-SR
Yes	Single Recept	15	14	3	25 (8)	SJOW-A/SJO	24.5 (11.1)	GCA14325-SR
Yes	Single Recept	15	14	3	35 (11)	SJOW-A/SJO	26.1 (11.8)	GCA14335-SR
Yes	Single Recept	15	14	3	50 (15)	SJOW-A/SJO	28.5 (12.9)	GCA14350-SR
Yes	Single Recept	15	14	3	70 (21)	SJOW-A/SJO	36.6 (16.6)	GCC14370-SR
Yes	Single Recept	20	12	3	25 (8)	SJOW-A/SJO	23.7 (10.8)	GCA12325-SR
Yes	Single Recept	20	12	3	35 (11)	SJOW-A/SJO	25.0 (11.4)	GCA12335-SR
Yes	Single Recept	20	12	3	45 (14)	SJOW-A/SJO	26.9 (12.3)	GCA12345-SR
Yes	Single Recept	20	12	3	50 (15)	SJOW-A/SJO	42.7 (19.4)	GCC12350-SR
Yes	Single Recept	20	12	3	70 (21)	SJOW-A/SJO	47.6 (21.6)	GCC12370-SR
Yes	Dual Recept	20	12	3	25 (8)	SJOW-A/SJO	23.4 (10.6)	GCA12325-DR
Yes	Dual Recept	20	12	3	35 (11)	SJOW-A/SJO	24.7 (11.2)	GCA12335-DR
Yes	Dual Recept	20	12	3	45 (14)	SJOW-A/SJO	26.0 (11.8)	GCA12345-DR
Yes	Dual Recept	20	12	3	50 (15)	SJOW-A/SJO	44.2 (20.1)	GCC12350-DR
Yes	Dual Recept	20	12	3	70 (21)	SJOW-A/SJO	49.1 (22.3)	GCC12370-DR
Yes	None	10	16	3	25 (8)	SJOW-A/SJO	21.7 (9.9)	GCA16325-BC
Yes	None	10	16	3	35 (11)	SJOW-A/SJO	22.4 (10.2)	GCA16335-BC
Yes	None	10	16	3	50 (15)	SJOW-A/SJO	23.4 (10.6)	GCA16350-BC
Yes	None	10	16	3	70 (21)	SJOW-A/SJO	34.8 (18.8)	GCC16370-BC
Yes	None	15	14	3	25 (8)	SJOW-A/SJO	22.2 (10.1)	GCA14325-BC
Yes	None	15	14	3	35 (11)	SJOW-A/SJO	23.1 (10.5)	GCA14335-BC
Yes	None	15	14	3	50 (15)	SJOW-A/SJO	24.4 (11.1)	GCA14350-BC
Yes	None	15	14	3	70 (21)	SJOW-A/SJO	36.2 (16.4)	GCC14370-BC
Yes	None	20	12	3	25 (8)	SJOW-A/SJO	23.2 (10.6)	GCA12325-BC
Yes	None	20	12	3	35 (11)	SJOW-A/SJO	24.5 (11.1)	GCA12335-BC
Yes	None	20	12	3	45 (14)	SJOW-A/SJO	25.8 (11.7)	GCA12345-BC
Yes	None	20	12	3	50 (15)	SJOW-A/SJO	42.2 (19.2)	GCC12350-BC
Yes	None	20	12	3	70 (21)	SJOW-A/SJO	47.1 (21.4)	GCC12370-BC



CORD REEL DIMENSIONS—inches (mm)

Reel size "A" (third letter in model number)

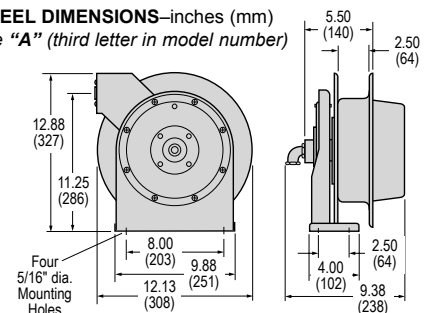

CORD REEL DIMENSIONS—inches (mm)

Reel size "C" (third letter in model number)

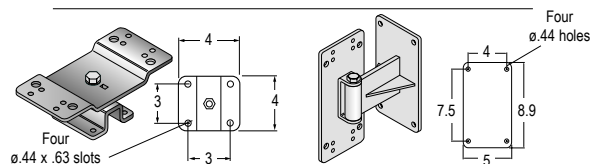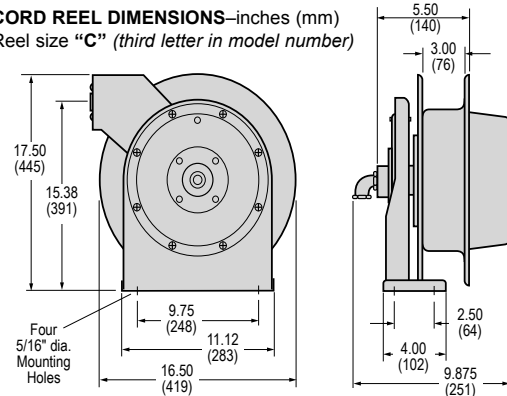

Optional 340° Pivot Base

Model RC-PB-B (left, above)

Reel follows activity for smoother operation, reduced cord wear.

Optional Wall Mounted Pivot Base

Model RC-WP (right, above)

Provides 180° pivot.

NOTE: Either base fits all reel sizes.